


Thermoelectric module QCG-127-1.4-1.2

Performance Data

V_{OC} , V	6.6	$T_{hot}=+175^{\circ}\text{C}$, $T_{cold}=+50^{\circ}\text{C}$
V_{load} , V	3.3	
R_{load} , Ohm	2.3	
W_{load} , W	4.8	
R_{in} , Ohm	2.3	
Module AC resistance, Ohm	1.2	$25 \pm 0.5^{\circ}\text{C}$

Tolerances for thermal and electrical parameters $\pm 10\%$

Dimensions in millimeters

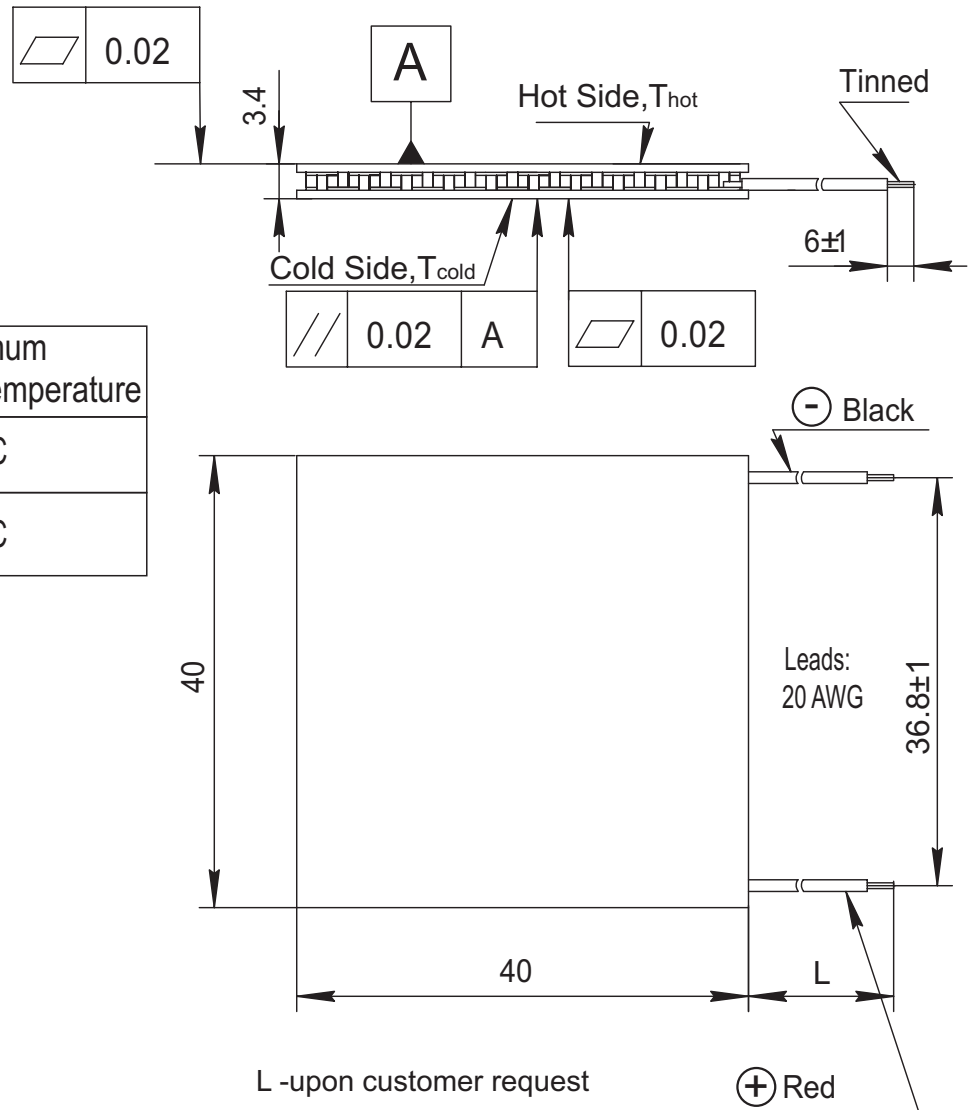


Options

Lead wire insulation	Maximum processing temperature
Silicone	180°C
PTFE	200°C

Additional

- RoHS 2002/95/EC compliant
- Cold Side and Hot Side Ceramics: Al_2O_3 , white 96%
- Assembling Solder : SnSb , M. P. 232 °C ; SnCu , M.P. 227 °C

QCG-127-1.4-1.2 power generating TE module

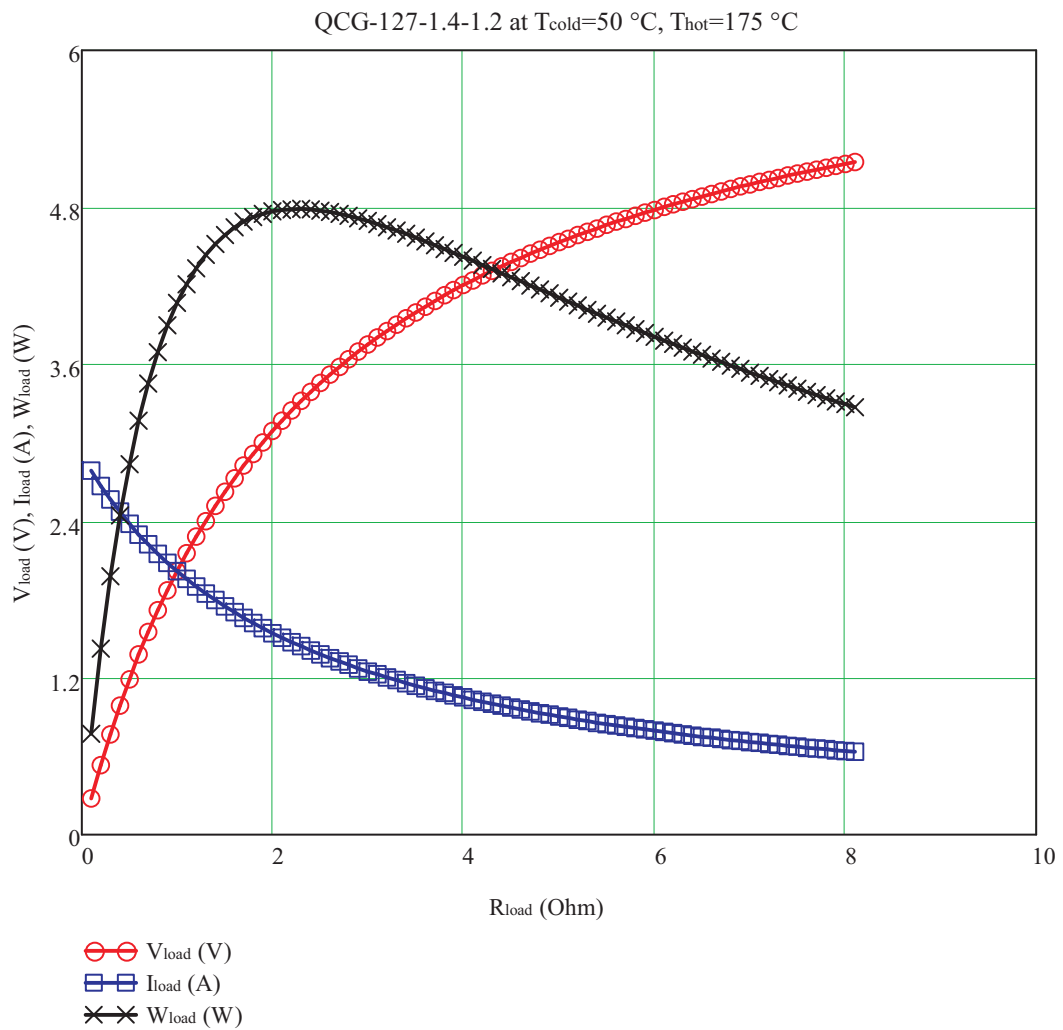

0.65 W / $^{\circ}\text{C}$ is a thermal conductance of the module at $T_{\text{cold}}=50\text{ }^{\circ}\text{C}$ and $T_{\text{hot}}=175\text{ }^{\circ}\text{C}$

$V_{\text{oc}} = 6.6\text{ V}$ is an open circuit voltage,

R_{load} is a load resistance, Ohm,

W_{load} is an output power corresponded to load resistance R_{load} , W,

V_{load} is an output voltage, corresponded to R_{load} , V.