


# Thermoelectric module QCG-127-2.0-1.3

## Performance Data

$V_{OC}, V$	6.6	$T_{hot}=+175^{\circ}C, T_{cold}=+50^{\circ}C$
$V_{load}, V$	3.3	
$R_{load}, Ohm$	1.2	
$W_{load}, W$	9.0	
$R_{in}, Ohm$	1.2	
Module AC resistance, Ohm	0.6	$25 \pm 0.5^{\circ}C$

Tolerances for thermal and electrical parameters  $\pm 10\%$

## Dimensions in millimeters

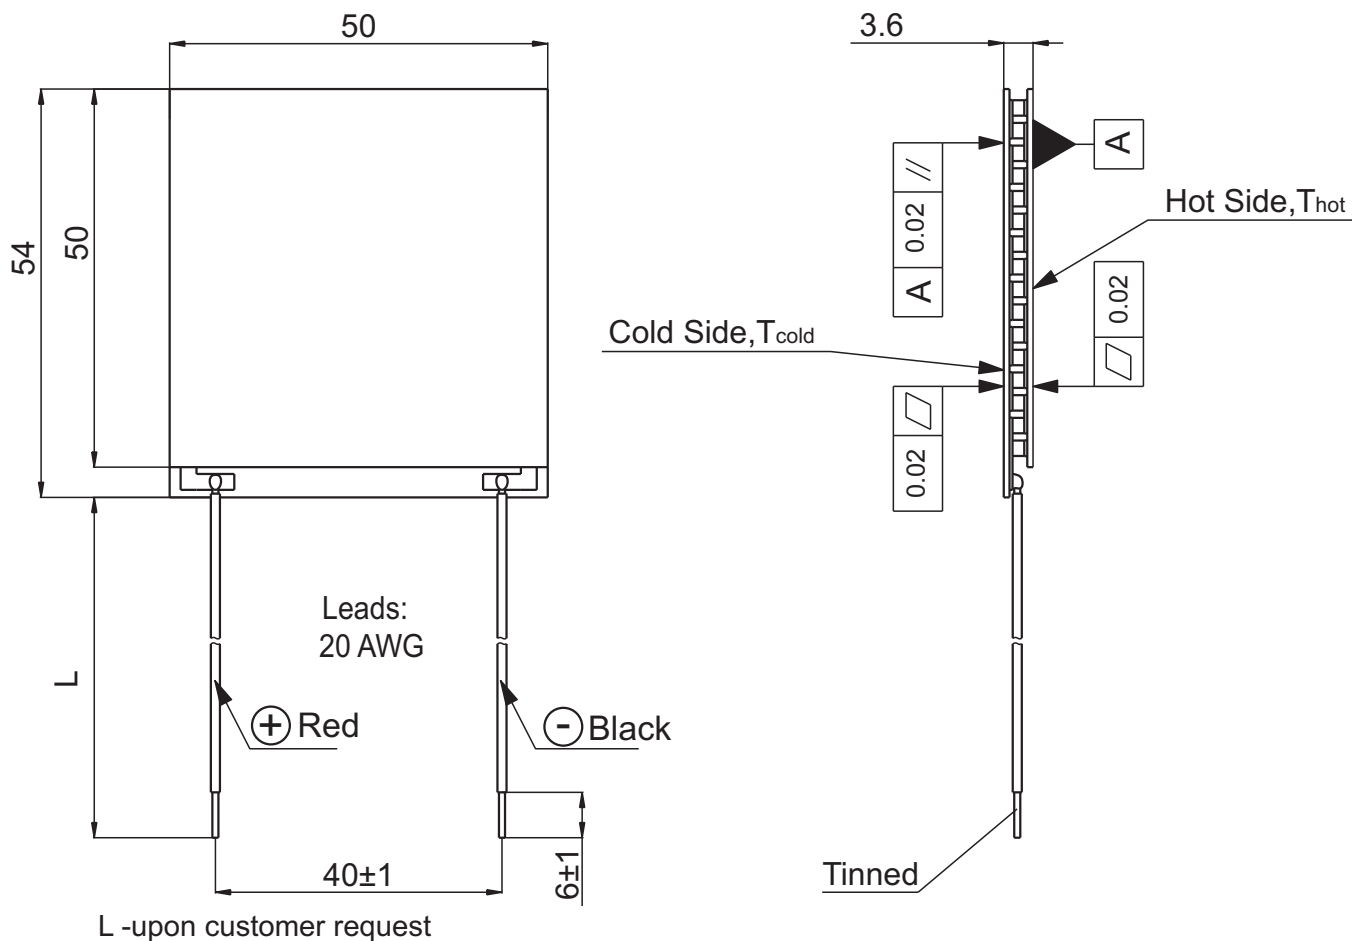


## Options

Lead wire insulation	Maximum processing temperature
Silicone	180°C
PTFE	200°C

## Additional

- RoHS 2002/95/EC compliant
- Cold Side and Hot Side Ceramics: Al<sub>2</sub>O<sub>3</sub>, white 96%
- Assembling Solder : SnSb, M. P. 232 °C ; SnCu, M.P. 227 °C

## QCG-127-2.0-1.3 power generating TE module

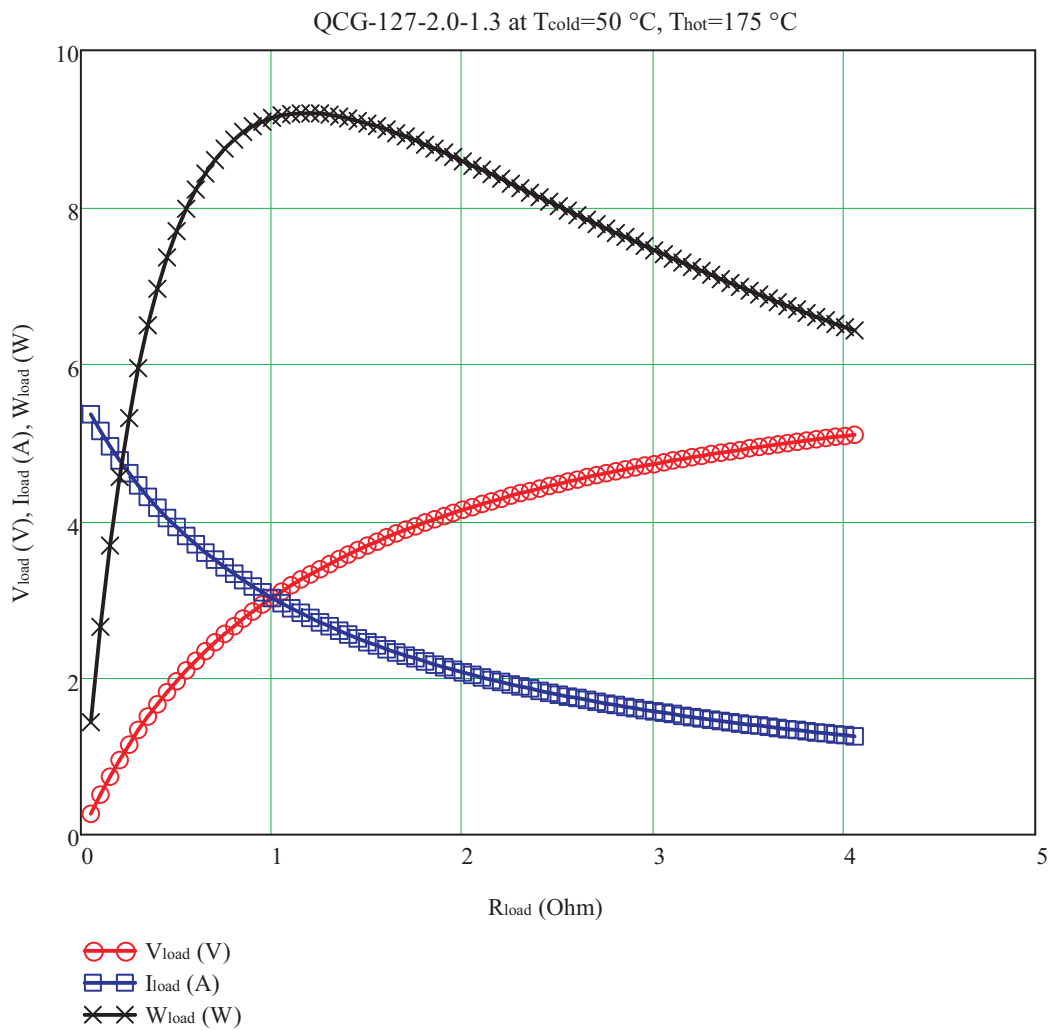

1.26 W / $^{\circ}\text{C}$  is a thermal conductance of the module at  $T_{\text{cold}}=50\text{ }^{\circ}\text{C}$  and  $T_{\text{hot}}=175\text{ }^{\circ}\text{C}$   
 $V_{\text{oc}} = 6.6\text{ V}$  is an open circuit voltage,  
 $R_{\text{load}}$  is a load resistance, Ohm,  
 $W_{\text{load}}$  is an output power corresponded to load resistance  $R_{\text{load}}$ , W,  
 $V_{\text{load}}$  is an output voltage, corresponded to  $R_{\text{load}}$ , V.